

RTS03 Built-in transmitter multifunction



Two standard buttons, two switches or one blind switch can be connected to the RTS03 built-in transmitter.

This turns conventional switch programs into radio switches and can therefore operate Easywave receivers.

Due to the small size, installation directly in a flush-mounted box is possible without any problems.

The transmitter is powered either via the built-in battery or wired with 3V DC.

One version for everything:

Compatible with all Easywave operating modes!




RTS03E5002C01-K


Technical specifications

Coding	Easywave
Frequency	868.30 MHz
Channels	2
Transmission time	max. 36 seconds
Range	typically 150 m in good free-field conditions
Power supply	1x 3V-battery, CR2032 or 3V DC wired
Operation	by connected button/switch
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	33/36/14.5 mm
Weight	10g


Wiring diagram

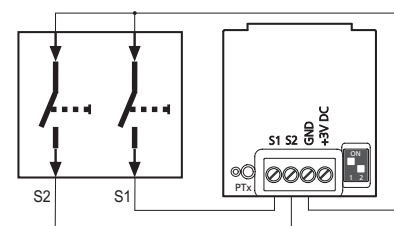

Button connection

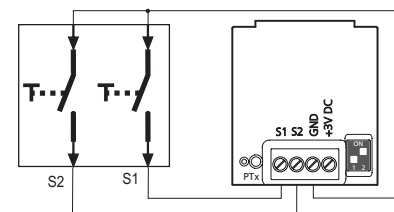

Switch connection

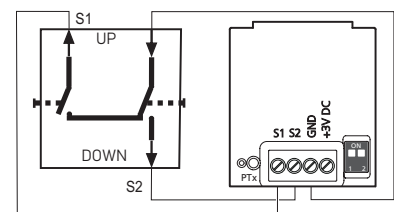

Blind switch connection

Scope of delivery

- Built-in transmitter
- Battery
- Operating manual

Models

Product number	Description
RTS03E5002C01-K	Built-in transmitter, Easywave, 2x PULSE 2x ON/OFF 1x UP/STOP/DOWN, white