

RCL08 Mini receiver

12-24 V AC/DC 2-channel

The wireless controller RCL08 has two potential-free relay contacts which can be activated by ELDAT secwave transmitters.

The RCL08 is operated at 12-24 V AC/DC, and up to 100 secwave transmitters per channel can be paired.




RCL08S5002A01-01K

Technical specifications

Coding	secwave AES 128-bit encryption Up to 100 transmitters per channel can be programmed. Not compatible with Easywave products!
Frequency	868.30 MHz
Channels	2
Power supply	12-24 V AC/DC
Power consumption	0.4 W standby at 24 VDC 0.8 W standby at 24 VAC
Operating modes	ON/OFF (1-button operation) PULSE (1 second)
Outputs	2 potential-free relay contacts (changeover)
Maximum contact load	
- AC	24 V / 1 A / 24 VA
- DC	30 V / 1 A / 30 W
Operating temperature	-20 °C to +60 °C
Dimensions (W/L/H)	70/64/35 mm
Color	white similar RAL 9003

Wiring diagram

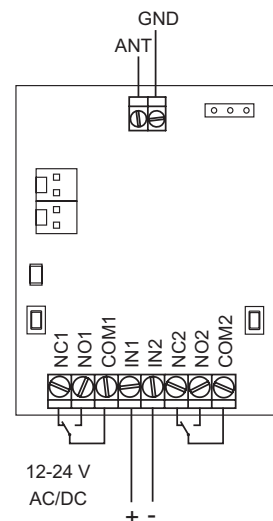

Scope of delivery

- Mini receiver
- Mounting kit
- Operating manual

Accessories (optional)

RCL03-ACC-01-00P	2x cable assembly length 45 cm
ACC-ANT50-03-21P	external antenna 868.30 MHz cable length 5 m



ACC-ANT50-03-21P



RCL03-ACC-01-00P

Models

Product number	Description
RCL08S5002A01-01K	Mini receiver, secwave, 12-24V, 2x changeover, potential-free, white